

C6C

600mm Two Burner/Griddle Gas Cooktop



C6C

- 600mm wide
- 2 open burners
- 300mm griddle plate
- 5kW open burner rating
- Flame failure standard on open burners
- Cast iron burners and vitreous enamel potstands
- 1 griddle burner with pilot, flame failure and piezo ignition
- Griddle plate machine finished 12mm thickness
- Open cabinet base for extra storage
- Adjustable front feet and rear rollers
- Stainless steel finish
- Fully modular

Also Available



C6B



C6D

OVERALL CONSTRUCTION

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- 12mm machined surface mild steel griddle plate
- Stainless steel front, sides and splashback
- Stainless steel cabinet interior base
- Stainless steel spill tray
- Griddle sections are standard on RH side only
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear

CONTROLS

- Large easy use control knobs
- Variable high to low controls to open and griddle burners
- Flame failure standard on open burners
- Griddles standard with pilot, flame failure and piezo ignition

CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable spill trays
- Stainless steel grease trays on griddle
- Access to all parts from front of unit

Matching Products



CR9D



CR6C



CF2



CR9A



CT6



C450



CP4




CS9 / C900-S



CT9

C6C

600mm Two Burner/Griddle Gas Cooktop

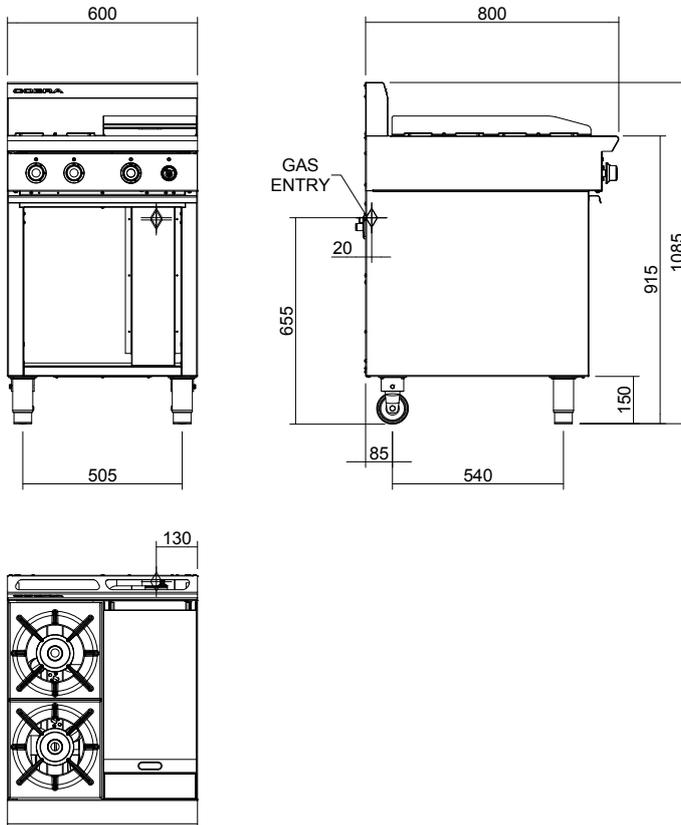

C6C

SPECIFICATIONS

Burners
 Open Burners;
 Natural Gas
 5.0kW each
 Propane gas
 4.6kW each

Griddle Burners;
 5.0kW per 300mm section

Gas power
 Natural gas
 15.0kW (nett), 56,840 Btu/hr (gross)
 Propane gas
 14.2kW (nett), 52,660 Btu/hr (gross)

Gas flow rate
 Natural gas 1.59m³/hr
 Propane gas 1.11kg/hr

Gas connection
 R 3/4 (BSP) male
 130mm from RH side, 20mm from rear, and 655mm from floor

Dimensions
 Width 600mm
 Depth 800mm
 Height 915mm
 Incl. splashback 1085mm

Nett weight
 74kg

Packing data
 0.85m³, 105kg
 Width 710mm
 Depth 955mm
 Height 1250mm

Gas types
 Available in Natural gas and Propane gas,
 please specify when ordering
 Other gas types on request

blue-seal.co.uk

United Kingdom
blue-seal.co.uk

Blue Seal Limited
 Unit 67
 Gravelly Business Park
 Gravelly
 Birmingham B24 8TQ
 England
 Telephone 0121-327 5575
 Facsimile 0121-327 9711
sales@blue-seal.co.uk

Australia
moffat.com.au

Moffat Pty Limited
 740 Springvale Road
 Mulgrave, Victoria 3170
 Australia
 Telephone +613-9518 3888
 Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited
 Rolleston
 45 Illinois Drive
 Izone Business Hub
 Rolleston 7675
 Telephone +64 3-983 6600
 Facsimile +64 3-983 6660
sales@moffat.co.nz



ISO9001
 Quality
 Management
 Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
 UK.C.01.19 / 1622

an Ali Group Company



The Spirit of Excellence